

# Preference-based Mobility Model and the Case for Congestion Relief in WLANs using Ad hoc Networks

Wei-jen Hsu, Kashyap Merchant, Haw-wei Shu, Chih-hsin Hsu, and Ahmed Helmy

Department of Electrical Engineering  
University of Southern California  
Los Angeles, USA  
{weijenhs, kkmercha, hshu, chihhsih, helmy}@usc.edu

**Abstract**—We consider usage of campus wireless LANs (WLANs) consisting of access points (AP) with potentially noncontiguous coverage. Through surveys on mobility patterns and wireless network usage on the University of Southern California (USC) campus, we find that mobility and usage patterns exhibit significant differences across various types of locations on campus. Using the collected data we build a realistic mobility model that we call Weighted-Way Point (WWP), to better simulate wireless network user behavior in a university campus environment. Using WWP, we show that unbalanced wireless network usage and hotspots are likely to occur on campus.

We further propose a mechanism to alleviate the local hotspot congestion by using multi-hop ad hoc networks. When a MN determines the local AP is unable to provide satisfactory bandwidth to an on-going flow, it requests the flow to be switched to a neighboring access point (NAP). Our mechanism differs from other schemes by allowing MNs to make the decision of initiating the flow-switching procedure and using bi-directional route-discovery from both the switching MN and NAP to reduce the route discovery delay. We use simulations to show that with this flow-switching mechanism, flows are more evenly distributed across APs. We also show that our mechanism reduces congestion time for popular APs and improves the user-perceived quality.

**Keywords**—Ad hoc network, wireless LAN, congestion alleviation

## I. INTRODUCTION

Quality-of-service (QoS) degradation due to local congestion has started to emerge as a potential problem for current mid-sized wireless LANs. Wireless network collapses due to network overloads at conferences such as TechEd in Barcelona and CeBIT in Hanover have been well-documented. Excessive requirement of bandwidth at some popular access points (APs) may lead to severe local congestion. Chances of congestion in wireless LANs are increasing as the demand for more bandwidth-consuming applications (such as streaming video) increases. However, it is possible that while some APs are overloaded, other neighboring APs are underutilized. In such situation, the whole system capacity may be enough to serve the aggregation of bandwidth requirement of concurrent users, but the unevenly distributed load results in poor QoS for wireless network users at some APs. To alleviate potential congestion in hotspots during peak hours, we introduce a mechanism that combines multi-hop ad hoc networks with access-point-based, last-hop wireless networks (wireless

LANs). We propose a hybrid wireless network in which mobile nodes (MNs) under a congested AP use a multi-hop wireless route to connect to a neighboring AP.

To better understand the effects of the underlying mobility model and wireless network usage model to hotspot formation in wireless LANs, we conduct a survey on the USC campus. Based on such data we create a Weighted Way Point (WWP) mobility model, which is a variant of the widely used RandomWay Point (RWP) model. Salient features of the WWP models include: (1) It incorporates the fact that the destinations of movement are *not* randomly picked with the same “weight” across the whole simulation area. People almost always show preference in their movements. (2) The parameters of a mobility model and network usage model (e.g. pause time, traffic flow duration, etc.) are location-dependent and time-dependent instead of constants throughout the simulation area or time. WWP model leads to more prominent uneven distribution of load on wireless LAN usage than RWP model. We further show that our flow-switching mechanism effectively reduces the problem of local congestion by allowing flows at congested APs to re-route to neighboring APs (NAP).

The rest of this paper is organized as follows. Section 2 discusses related work. Survey results, WWP mobility model and their inferences are introduced in section 3. We explain our flow-switching mechanism in section 4 and simulation results in section 5. Section 6 concludes the paper.

## II. RELATED WORK

Wu et al. [1] proposed an ad hoc relaying architecture named iCAR for cellular phone system. It involves installing signal relay nodes on the boundary of cells through which a MN can access neighboring base stations. As suggested by the iCAR project, forming multi-hop path to neighboring cells is one way to alleviate local congestion. In [2] the authors use a similar mechanism, in which the AP seeks help from its NAPs if it cannot support all the requests made in its coverage area. They propose an AP-initiated mechanism in which congested AP seeks help from neighbors if its bandwidth utilization is higher than a threshold. However, if the requirements of mobile nodes are different, which is usually the case in wireless data networks, the mobile node has the best knowledge of whether its requirement is satisfied by the local access point (LAP) or it

---

A. Helmy was supported by grants from NSF Career, Intel and the Pratt&Whitney Institute for Collaborative Engineering (PWICE).

should try to switch to one of the NAP. Therefore we consider the MN more suitable to initiate the flow-switching process.

There are several other previous works on heterogeneous networks combining last-hop wireless networks and ad hoc networks. For example, a system called Sphinx [3] involves forming an ad hoc network between MNs in a cellular system to increase the throughput per unit power and fairness among flows. In [4] the authors propose a mechanism for AP to dynamically assign channels to MNs under its coverage so that they can communicate with each other without going through AP by forming an ad hoc network on another channel.

On the relationship between uneven load distribution and hotspots in wireless networks, in [5] the authors have demonstrated that in cellular phone systems mobility preference based hotspots have global influence on network performance. In [6] the authors have suggested that an MN may choose different locations on a campus with different preferences (different “weights”) as its next destination in future works. As people move toward the “popular spots” on campus, preference-based hotspot may form. We investigate this further and discover that it is indeed the case by carrying out a mobility pattern survey first, then synthesizing the WWP mobility model and using it to investigate its effect on hotspots.

While this paper focuses on the mechanism to re-distribute the load of wireless LANs across APs, there is no absolute guarantee that the switching will be successful, or the bandwidth on the ad hoc path is enough for the flow. QoS guarantees in ad hoc network is an interesting problem. In [9] the authors proposed a mechanism called SWAN, which is basically a stateless decentralized flow admission control to achieve QoS in ad hoc networks. Mechanisms like SWAN can work in parallel with our mechanism to ensure there is enough bandwidth on the ad hoc route.

### III. PREFERENCE-BASED MOBILITY MODEL FOR CAMPUS ENVIRONMENTS

There are wide families of mobility models in ad hoc network studies [6][7]. However, these works did not address one important issue: Human beings usually do not pick a destination randomly. Some locations are more popular than others for a given environment, such as classrooms, libraries and cafeterias during lunch time on a campus. We investigate this issue and propose a preference-based mobility model based on a mobility survey performed on the USC campus.

#### A. Modeling Preferences of Movement

We seek to model the movement of MNs on campus as transition from building to building. From our observation, the general pattern of daily activities on campus is a repetitive pattern of going to one location, staying for a while to finish a task, then moving on to another location. In our context we call each movement from location to location as a *transition*.

We divide the buildings on campus into 3 categories based on its functionality: *classrooms*, *libraries*, and *cafeterias*. These

buildings are referred as *locations* henceforth. The places that do not belong to the above 3 categories on campus are defined as *other* areas, and the campus is surrounded by *off-campus* area. The off-campus area is added to model the fact that some nodes may leave the simulation area (i.e. the campus) but come back later. This feature is not modeled in most simulation studies on ad hoc networks. In this paper we use the simulation environment as shown in Fig. 1. This virtual campus topology is adopted from a small part of the actual USC campus. In this scenario we define noncontiguous locations: 3 classrooms, 2 libraries, and 2 cafeterias.

While MNs move in the virtual campus, their behavior may vary according to the location type at which it stops. We model such location-dependent behavior by using different pause time distributions, weights for selecting next destination, and network usage for different location types. We get these parameters from a mobility survey on USC campus. From the collected data, we derive pause time distributions for the 3 *locations* and *other* areas on campus. We find that these distributions vary significantly across the different location types. The pause time distribution of classrooms is bell-shape distributed with the peak at about 90 minutes, which is the general duration of classes. For cafeterias and *other* areas on campus, the distribution is skewed toward the shorter pause interval, similar to exponential distribution. Distribution for pause time at libraries displays long-tail characteristic. We assume off-campus pause time is a roughly estimated fixed value. For next destination selection, we use a Markov model in which MN chooses its next destination with different sets of weights depending on its current location. In our survey result, it also shows the weights are time-variant. For example, MNs will be more likely to choose cafeterias as the next destination around lunchtime. The weight-distribution now depends on both MN’s current location and time. Hence the mobility model is a time-variant Markov model. We call this mobility model the Weighted-Way point (WWP) model. We believe this model is more realistic than traditional mobility models that treat the simulation area as a homogeneous area throughout.

The characteristics of wireless usage are captured by *flow-initiation probability* and *flow duration distribution*, both are location-dependent parameters. We assume only the locations (classrooms, libraries, and cafeterias) are covered by the access point. Here, we are interested in wireless LAN usage, hence we assume that MNs use the wireless LAN only when they stop within AP coverage. MNs can only start a flow to the local AP when they stop within locations with a location-dependent flow-initiation probability. A MN never tries to start a flow outside of the locations, as those areas are not covered by APs. Through our survey we find that different locations have different popularity for wireless LAN users. The libraries are the most likely potential hotspot, since the flow-initiation probability is higher, and the flow duration is longer than the other location types.

The details of survey results are not shown here due to limited space. Interested readers can find those data in [10].

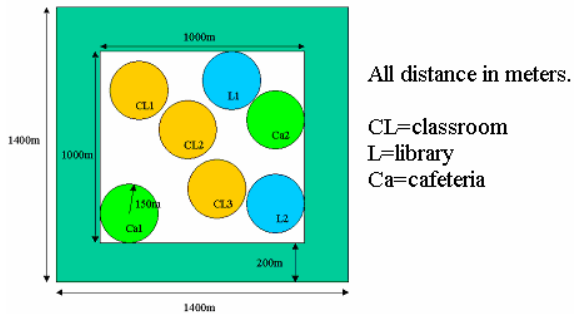


Figure 1. Topology of virtual-campus

### B. Impact of Preference-Based Mobility Model

One direct impact of WWP model is that MNs tend to have an uneven distribution in the simulation area. MNs tend to move to locations rather than *other* areas with the WWP model. In Fig. 2 we show the MN density distribution of 200 MNs during 500-second simulation run. (In the simulations in this paper, we scale down the time so that 1 second in simulation time corresponds to 1 minute in real time. A 500-second simulation run corresponds to 8 hours and 20 minutes simulation of a day from 9AM to 5:20PM, as weights for choosing the next destination change during the day. According to the scaling factor, MN moving speed is uniformly distributed between 30m/s to 75 m/s – scaled up 60 times from normal human walking speed 0.5m/s to 1.25m/s.) We can see that the node densities at locations are much higher than *other* area or off-campus area. This is an artifact that in WWP model, the weights for choosing the locations as destination is much higher than choosing *other* area or off-campus area.

As the MNs cluster at the locations, more flows are generated toward local APs. However, since the distribution of MNs is uneven across locations, the distribution of flows is also uneven across APs. We show the number of simultaneous flows at 3 APs located in the upper-right corner of the virtual campus (Fig. 1) as a function of time in Fig. 3 for the 200 MN case. While the AP at library 1 has large number of flows, APs at classroom 2 and cafeteria 2 are quite underutilized. This uneven distribution of flows suggests the possibility of using ad hoc techniques to re-route some flows to the underutilized neighboring APs in order to alleviate local congestion.

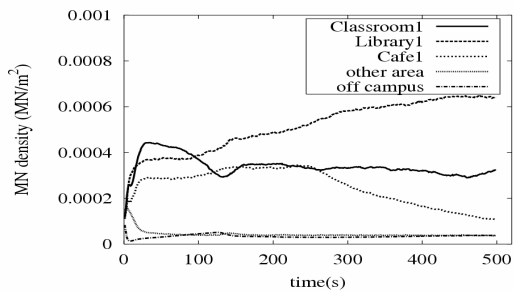


Figure 2. MN densities much higher at locations – clustering effect

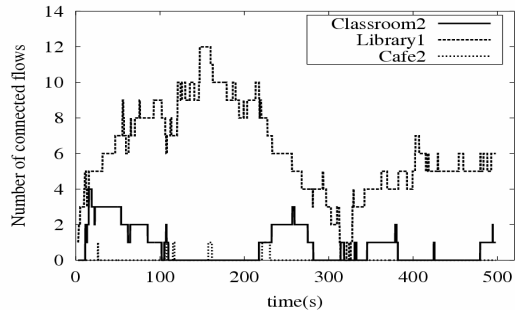


Figure 3. Uneven flow distribution across APs

### IV. CONGESTION ALLEVIATION MECHANISM

As suggested by the highly uneven distribution of flows among APs illustrated in Fig. 3, it is feasible to improve the QoS of the flows at the congested AP, if we can find a multi-hop ad hoc route to redirect it to underutilized NAPs. We propose the following MN-initiated flow-switching mechanism to achieve this goal.

The nodes with on-going flows keep monitoring the average end-to-end throughput to the local access point (LAP). If the average throughput is lower than an application-defined threshold, the MN notifies the LAP that it would like to be re-routed to a NAP using ad hoc multi-hop route, in the hope of getting better average throughput.

The MN notifies the LAP of its request to be switched to other APs by sending a “re-route request” to the LAP. Upon receiving this message, the LAP requests help from its neighbors by sending “help” message to one of them. The choice of the neighbor is based on AP’s geographical knowledge of the topology. The AP will make a random choice from its close by neighbors. It is possible to make a better choice by looking at the current loads of NAPs. The NAP replies with a “help ACK” message. The local AP then notifies the two parties (MN and NAP) about ID of each other. Based on this information, the neighbor AP and the MN can send out a route request packet (We adopt DSR [8] as the ad hoc routing protocol.) for each other simultaneously. This is achievable because the wired network provides a “tunnel” to exchange information between the MN and the NAP before they actually establish an ad hoc route to each other. The intermediate nodes at which the bi-directional searches meet will concatenate the partial routes from both ends and send back route reply messages to the MN and NAP. Such “meet in halfway” behavior is possible because DSR caches the partial route a route-request packet traversed before reaching the node, therefore an intermediate node is able to establish the end-to-end path if it is visited by route-request packets from both ends one after the other. The bi-directional search for the ad hoc route can potentially reduce the route discovery time.

In our work we assume that MNs uses a dedicated wireless channel to communicate with other MNs, so that the ad hoc network does not interfere with congested local wireless channel used by LAP and other MNs. This can be achieved by

reserving a dedicated channel for ad hoc communication. All APs and MNs in the system must agree on using this reserved channel only for ad hoc communication. The channel is not used locally by any AP.

If the LAP assigns a MN to be switched to one of its neighbor, but there is no available multi-hop route from the MN to NAP, the switching is considered a failure and the MN will reestablish its connection to the LAP after a fixed period of time. If the MN is able to establish route to the designated NAP, but the route breaks later due to movement of intermediate nodes, the MN will also reestablish the connection to the LAP. Such fall-back-to-LAP behavior is necessary to avoid a MN waiting indefinitely for an ad hoc route to the designated NAP, which may not appear for a long time. If the LAP is still congested, the MN may start another switch trial later, possibly to another NAP. Note that for the duration of the flow to LAP, the MN stays stationary, so the route to the LAP is always available. The MN switches the flow to NAP only for better throughput, not because route to LAP is unavailable.

In order to avoid the situation that all MNs sense the congestion at LAP at the same time and try to switch, potentially leaving the LAP underutilized and the NAPs congested, we add a randomization factor in making switching decisions. When a MN sense local congestion, it does not always try to switch immediately. Instead, it sends the re-route request with switching-initiation probability  $p$ . By adjusting the switching-initiation probability, we can reduce the ping-pong effect at the cost of slower response to local congestion. The operation of our proposed mechanism is summarized in fig 4.

## V. SIMULATION RESULTS

We use *ns-2* network simulator to simulate our proposed flow switching mechanism. We vary the total number of MNs in the simulation area from 100 to 200 to illustrate different degree of congestion. The mobility model used by the MNs is the proposed WWP model introduced in section 3. In the simulation, we assume that each AP operates at bit rate of

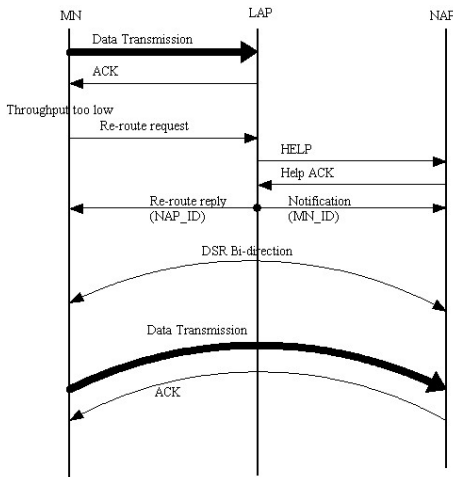


Figure 4. The control flow chart of proposed flow-switching mechanism

2Mb/s. Each MN flow requires 200Kb/s throughput. To simplify the simulation, the MNs identify LAP congestion by counting current number of flows connected to LAP. The local AP becomes congested and throughputs for local flows start to drop if 7 or more simultaneous flows are connected to the LAP (This number was obtained via detailed simulations. The wireless channel cannot reach 100% utilization because of contention in wireless channel.) We simulate the scenario both with and without the flow switching mechanism.

The effect of the flow-switching algorithm is primarily to re-distribute the load of traffic across the APs. If some AP becomes congested, the MNs sense the congestion by observing degradation in the throughput of the on-going flow and try to switch the flow to NAP. If some of the MNs succeed in flow switching, the excessive flows at the LAP will shift to its neighbors, and both the flows that are switched and the flows that stay at the LAP can have uncongested wireless channel and better throughput. This idea is illustrated by comparing Fig. 3 to Fig. 5, where we illustrate the number of flows at the same 3 APs located in the upper-right corner of the virtual campus (Fig. 1), with the flow-switching mechanism. We see that some flows at library 1 are switched to classroom 2 and cafeteria 2, so the congestion at library 1 is not as bad as the case without flow-switching show in Fig. 3.

To better understand the effect of the flow-switching mechanism on the overall improvements of the system, we propose to use the metrics “AP congested time ratio” and “flow quality time ratio”. The former is defined as the time ratio an AP has at least 7 flows connected to it. This is the time ratio that the AP cannot provide adequate QoS to the connected flows. The latter is defined as the time ratio of a flow connected to any AP with less than 7 flows connected simultaneously. This is the proportion of time the flow can receive adequate throughput. Note that between the time a MN decides to switch a flow to NAP until the time it finds a route to the designated NAP, the flow is not connected to any AP hence this time period will not be counted toward the quality time ratio. Results shown below are averages of 6 independent simulation runs, using random mobility scenario for each.

Fig. 6 shows the average of AP congested time ratio of all APs. Fig. 7 shows the average of AP congested time ratio of the most congested AP in each simulation run. We can see that due to the uneven MN distribution resulting from the WWP model, the overall congested time ratio is low for the whole

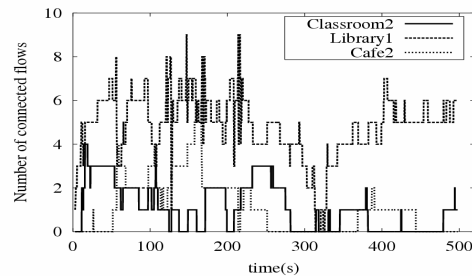


Figure 5. Flows re-distributed across APs, relieving congestion at library 1

system. However, the most congested AP is quite overloaded. This is exactly the situation when flow-switching to NAPs should be helpful. From the figures we see that the congested time ratio of the most congested AP is reduced by more than 50% in all except for the 100 MN case. This implies flow-switching helps to reduce the local congestion of wireless LANs more than half of the time when congestion exists.

The flow quality time ratio is the metric to observe the improvement we get by employing flow-switching from user's perspective. In Fig. 8 we show the flow-switching mechanism improves the quality time ratio for all cases.

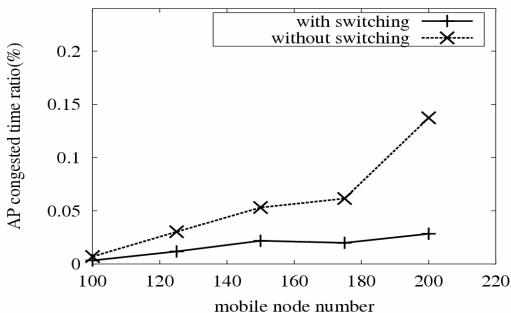


Figure 6. Average AP congested time ratio of all APs

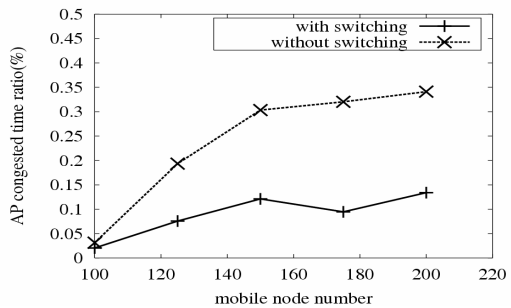


Figure 7. Average AP congested time ratio of the most congested AP

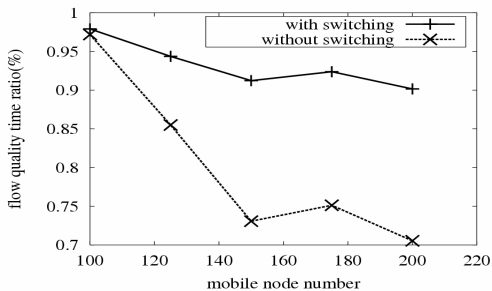


Figure 8. Average quality time ratio of all flows

We observe in the case for lower MN numbers (100 or 125 MNs) the effect of flow-switching is not so pronounced. This is because when the network is sparse, there is less chance to find a route to NAPs for switching flows. Hence the effectiveness of flow-switching is limited. The success rate for a switching flow to find a route to the chosen NAP is about 0.27 when there are 100 MNs, and the success rate increases to 0.43 when there are 200 MNs.

## VI. CONCLUSIONS

We propose the WWP model to capture the location-based preferences in mobility model and network usage. Under this more realistic mobility model, distribution of MNs is uneven, leading to uneven usage of wireless LANs and congestion at some APs. However, the whole system in aggregation still has the capacity to serve the aggregated load. We propose a MN-initiated flow-switching mechanism, which involves the use of ad hoc networks to redistribute some flows from congested AP to its NAPs. Simulation results show that the mechanism improves AP congested time ratio and flow quality time ratio.

## ACKNOWLEDGMENT

The authors would like to thank Fan Bai and Ganeshha Bhaskara for their helpful comments on this work.

## REFERENCES

- [1] H. Wu, C. Qiao, S. De, and O. Tonguz, "Integrated cellular and ad hoc relaying systems: iCAR," *IEEE Journal on Selected Areas in Communications*, Volume: 19, Issue: 10, pp. 2105-2115, Oct. 2001.
- [2] J. Chen, J. He, and S.-H. Chan, "A framework to relieve wireless hotspot congestion by means of ad-hoc connections," *The fifth IFIP TC6 International Conference on Mobile and Wireless Communication Networks (MWCN '03)*, Oct. 2003.
- [3] H.-Y. Hsieh and R. Sivakumar, "On using the ad-hoc network model in cellular packet data networks," *MOBIHOC 2002*, pp. 36-47, Jun. 2002.
- [4] J. Chen, S.-H. Chan, J. He, and S. Liew, "Mixed-mode WLAN: the integration of ad hoc mode with wireless LAN infrastructure," *GLOBECOM 2003*, Volume: 1, pp. 231-235, Dec. 2003.
- [5] J. Jobin, Michalis Faloutsos, Satish K. Tripathi, and Srikanth V. Krishnamurthy, "Understanding the effect of hotspot in wireless cellular networks," *INFOCOM 2004*, Mar. 2004.
- [6] A. Jardosh, E. M. Belding-Royer, K. C. Almeroth, and S. Suri, "Towards realistic mobility models for mobile ad hoc networks," *MobiCom 2003*, pp.217-229, Sep. 2003.
- [7] F. Bai, N. Sadagopan, and A. Helmy, "The *IMPORTANT* framework for analyzing the impact of mobility on performance of routing for ad hoc networks," *AdHoc Networks Journal - Elsevier Science*, Vol. 1, Issue 4, pp. 383-403, Nov. 2003.
- [8] D. Johnson, D. Maltz, and J. Broch, "DSR: The dynamic source routing protocol for multi-hop wireless ad hoc networks," in *Ad Hoc Networking*, edited by C. Perkins, Chapter 5, pp. 139-172, Addison-Wesley, 2001.
- [9] G. Ahn, A. Cambell, A. Veres and L. Sun, "SWAN: Service differentiation in stateless wireless ad hoc networks," *INFOCOM 2002*, Volume: 2, pp. 457 - 466, Jun. 2002.
- [10] W. Hsu, K. Merchant, H. Shu, C. Hsu, and A. Helmy, "Preference-based mobility model and the case for congestion relief in WLANs using ad hoc networks," USC technical report, available at <http://www-scf.usc.edu/~weijenhs/WWP.html>